

# MOTOTRBO™ CAPACITY MAX











## HIGH CAPACITY, COVERAGE AND CONTROL

The next generation of trunking has arrived. MOTOTRBO Capacity Max blends real-world experience with technological innovation to deliver a communications solution that's tailor-made for your organization.


Your communications system is at the heart of your organization: keeping your workers productive and maintaining safety at all times. So when you're a large organization with sophisticated requirements and the highest standards, you should choose the best technology and the most comprehensive solution: MOTOTRBO Capacity Max.

Capacity Max is a trunked radio system with a dedicated control channel at every site. The centralized architecture reduces deployment complexity and operational cost, while increasing flexibility and scalability. The system offers a crisp, responsive user experience, with high security and reliability. And a suite of built-in tools and applications gives you complete control and visibility of your system's operation.

## MOTOTRBO SYSTEM TYPES

CONVENTIONAL	IP SITE CONNECT	CAPACITY PLUS	CONNECT PLUS	CAPACITY MAX
NON - TRUNKING		TRUNKING		
BASELINE CAPACITY AND COVERAGE	ENHANCED COVERAGE	COST-EFFECTIVE COVERAGE AND CAPACITY	COVERAGE AND CAPACITY	CAPACITY, COVERAGE AND CONTROL
 SINGLE SITE	 UP TO 15 SITES	 UP TO 15 SITES	 UP TO 250 SITES	 UP TO 250 SITES
 UP TO 200 USERS	 UP TO 200 USERS	 UP TO 1600 USERS PER SITE	 UP TO 3000 USERS PER SITE	 UP TO 3000 USERS PER SITE

SYSTEM ARCHITECTURE

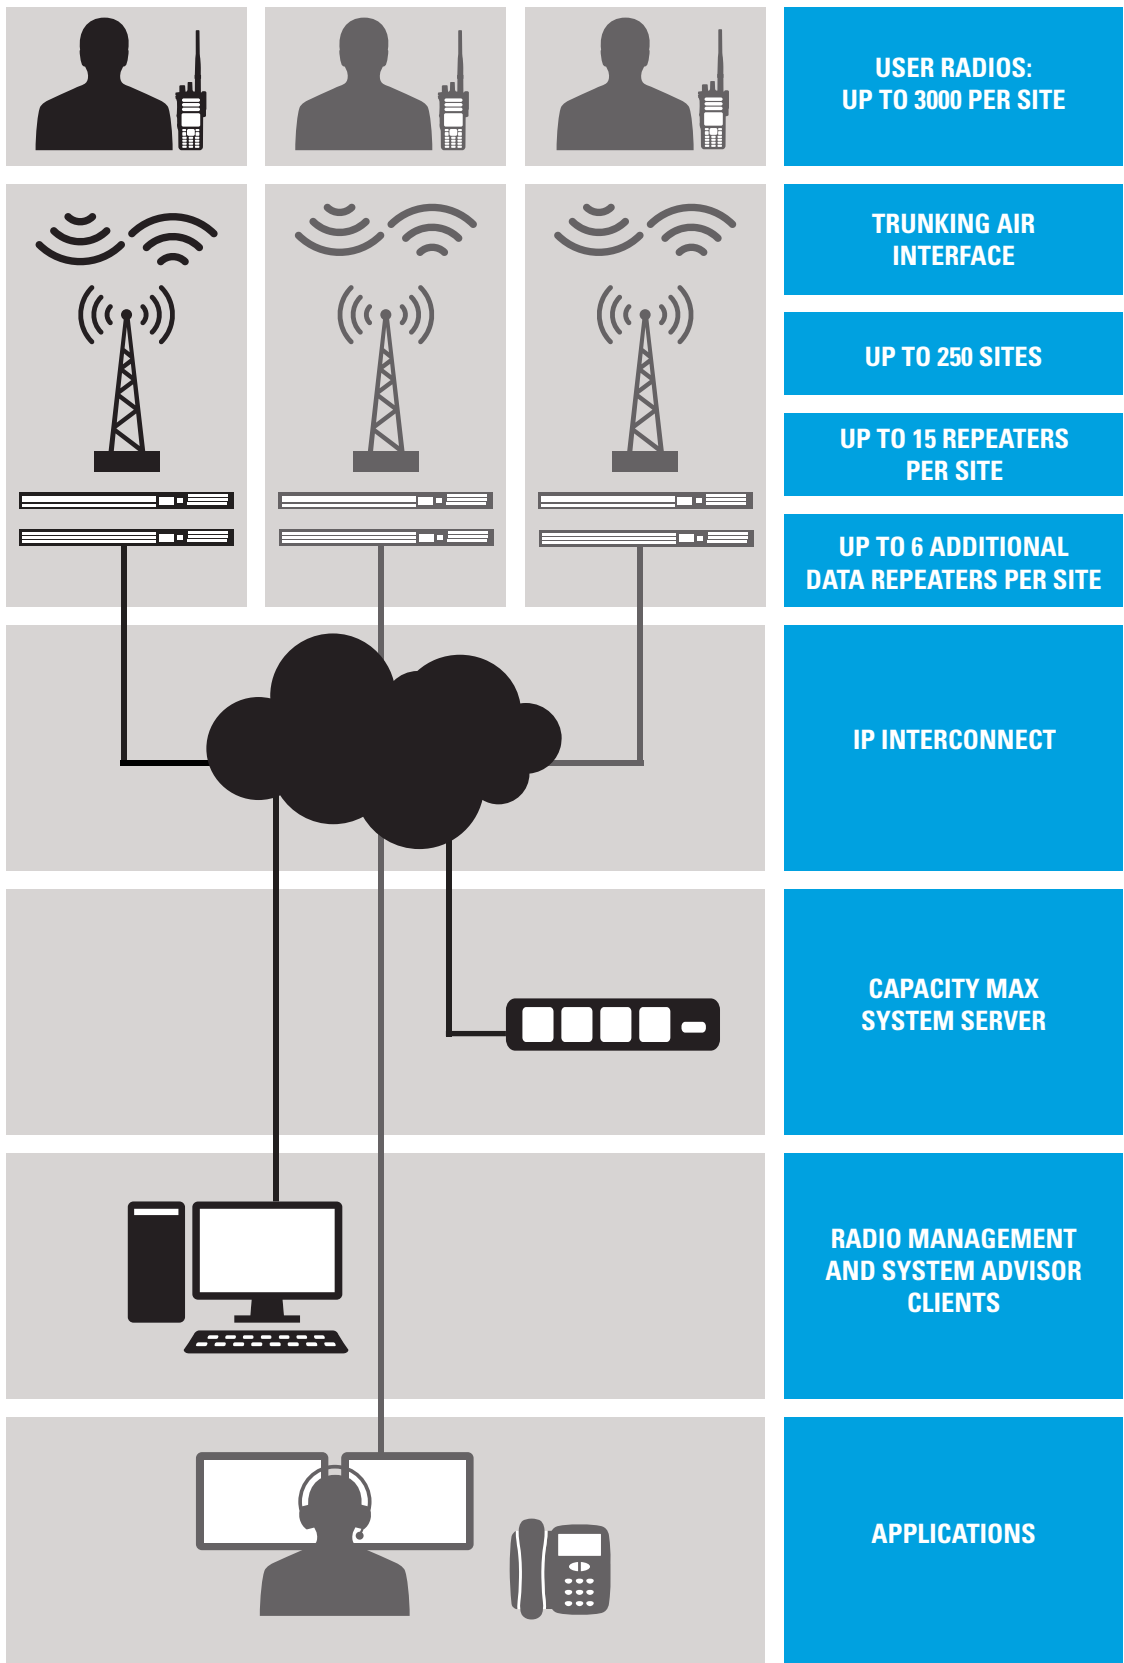

# HIGH CAPACITY, COVERAGE AND CONTROL

## HIGH PERFORMANCE

Capacity Max has a fast, responsive user experience, with robust performance under load and rapid, smooth roaming across sites. Security is a high priority, with options for authentication, access control and encryption. And to ensure optimum operation, Capacity Max incorporates sophisticated fault management and call monitoring tools.


## EFFICIENT

The system is built around a standardized IP network: there is no requirement for specialized interconnections. Signaling and traffic flow has been optimized to make the most efficient use of network bandwidth. The Capacity Max System Server (CMSS) centralizes control and management functions, as well as hosting voice applications gateways.


## SCALABLE

Capacity Max is scalable to 250 sites, with up to 15 voice and data repeaters and up to 6 additional data-only repeaters per site, giving high-quality connectivity to up to 3,000 users at each location. The system uses standardized infrastructure, so you can migrate to Capacity Max from a MOTOTRBO IP Site Connect, Capacity Plus or Connect Plus system and reuse your earlier investment.

## RADIO MANAGEMENT



## SYSTEM ADVISOR

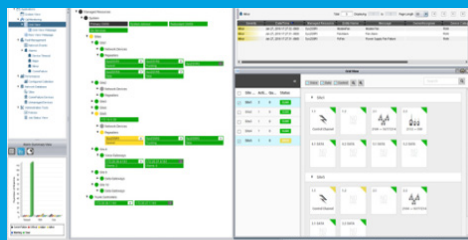

## RADIO COMPATIBILITY



XiR P8600 Series and  
XiR P8600i Series



SL1K and SL2K



XiR M8600 Series and  
XiR M8600i Series

## APPLICATIONS



Capacity Max supports a broad ecosystem of voice and data applications from the MOTOTRBO Application Developer Program.

For Control Room Solutions , Capacity Max supports the Motorola Sold and Supported **SmartPTT PLUS** and **TRBOnet PLUS**.

To find out more about Capacity Max, please go to [motorolasolutions.com/ap/mototrbo](http://motorolasolutions.com/ap/mototrbo)

### Motorola Solutions Singapore Pte Ltd

12 Ang Mo Kio Street 64, Ang Mo Kio Industrial Park 3, UE Biz Hub, Block A, Level 7 Singapore 569088

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylised M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. ©2016 Motorola, Inc. All rights reserved.

Cap\_Max\_DS\_AP\_1216

**MOTOTRBO**  
DIGITAL  
REMASTERED.